

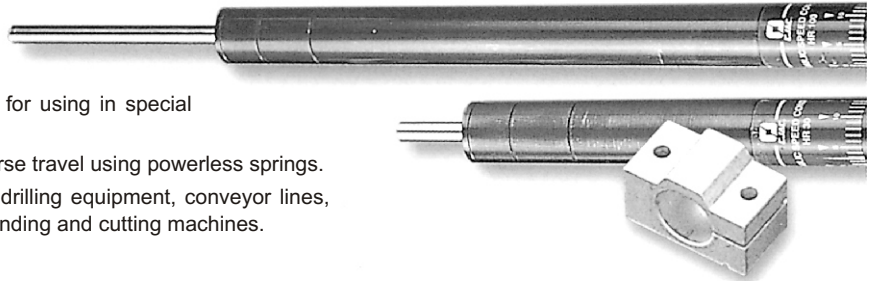


- Hydraulic Speed Controllers are ideal for all kind of cutting tools on machines which need continuous, stable feeding speed.
- Completely sealed construction with anti-dust function to prevent oil leakage, perfect for using in special environment.
- Feeding speeds freely are variable, with reverse travel using powerless springs.
- Small size easy to install, suitable for robot drilling equipment, conveyor lines, pneumatic tools, woodworking equipment, grinding and cutting machines.

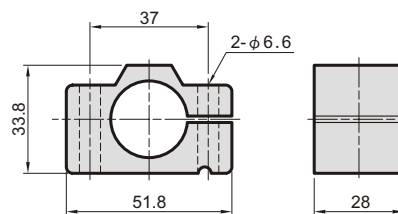

### Specification

| Order no. | A     | B     | Max. stroke (mm) | Operating temperature (°C) | Max. load | Weight (g) |
|-----------|-------|-------|------------------|----------------------------|-----------|------------|
| MHR 30    | 202   | 172   | 30 mm            | 0-60°C                     | 15~350kg  | 495 g      |
| MHR 60    | 282.5 | 222.5 | 60 mm            | 0-60°C                     | 15~350kg  | 615 g      |
| MHR 80    | 350   | 270   | 80 mm            | 0-60°C                     | 15~350kg  | 690 g      |
| MHR 100   | 396   | 296   | 100 mm           | 0-60°C                     | 15~350kg  | 765 g      |

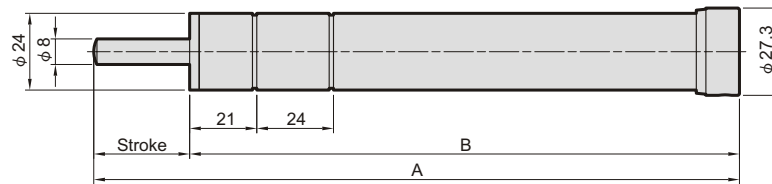

### Application example:

