METG2-8 series

SLIDER ELECTRIC ACTUATOR – BUILT-IN GUIDEWAY (WITHOUT MOTOR)

Selection table
Applications
Inner structure
Measuring tools
Reference
Motor selection
Caution
(Read before installing)



Specification

Model			METG2-8		
Positioning repeatability		(mm)	±0.005		
Ball screw lead		(mm)	5	10	20
Max. speed (*1)		(mm/s)	250	500	1000
AC servo motor		(W)	200W, 400W		
Rated load	Horizontal	(kg)	50	30	18
	Vertical	(kg)	15	8	3
Stroke (*2)		(mm)	50~1100 / 50 pitch		
Ball screw		(mm)	C7ø16		
Slot-type photomicro sensor			PU-Y974(P)		

*1. Acceleration and deacceleration values are set to 0.2 second.

*2. Reduce the speed when the stroke exceeds 600 mm due to resmance.

Order example

METG2 – 8 – L10 – 100 – BC – M20 – C4

Model: METG2

Size: 8

Stroke: **50~1100** mm, 50 mm pitch

Ball screw lead

L05	5 mm
L10	10 mm
L20	20 mm

Motor position

BC	Direct connection
BM	Lower side
BR	Right side
BL	Left side

Flange (For motor installation)

Applicable motor brand (*1)		Power output	
M	Mitsubishi	**20** **40**	200W 400W servo
	Yaskawa		
	Delta		
P	Panasonic		

Home sensor (*2)

Out side	
C	Motor side
D	Opposite motor side
No sensor	
E	None


Limit sensor

Out side	
3	1 Pc
4	2 Pcs
No sensor	
5	None

*1. Motor not included. Please refer to the "Motor Selection Table" for details.


*2. When the stroke is 50mm, the sensor installation has the following restricitions.
1. Home sensor and limit sensor has to be installed on the different side of body.
2. Install sensor trigger on both side.

Allowable overhang




Unit: mm

Horizontal installation		A	B	C
Lead 5	20kg	1560	153	237
	35kg	890	81	126
	50kg	550	53	82
Lead 10	10kg	1730	286	412
	20kg	839	136	196
	30kg	541	86	124
Lead 20	6kg	1213	403	493
	9kg	800	264	323
	18kg	529	194	238



Unit: mm

Wall installation		A	B	C
Lead 5	20kg	214	153	1435
	35kg	113	81	845
	50kg	74	53	506
Lead 10	10kg	370	286	1400
	20kg	176	136	800
	30kg	112	86	495
Lead 20	6kg	444	403	760
	9kg	292	264	277
	18kg	214	194	544



Unit: mm

Vertical installation		A	C
Lead 5	10kg	331	331
	15kg	220	220
Lead 10	5kg	589	589
	8kg	368	368
Lead 20	2.5kg	935	935
	–	–	–


- The upside - down crane cannot be used according to the standard specification, please contact us if there is any demand.

METG2-8 Dimensions

SLIDER ELECTRIC ACTUATOR – BUILT-IN GUIDEWAY (WITHOUT MOTOR)

mindman


BC
Motor direct connection

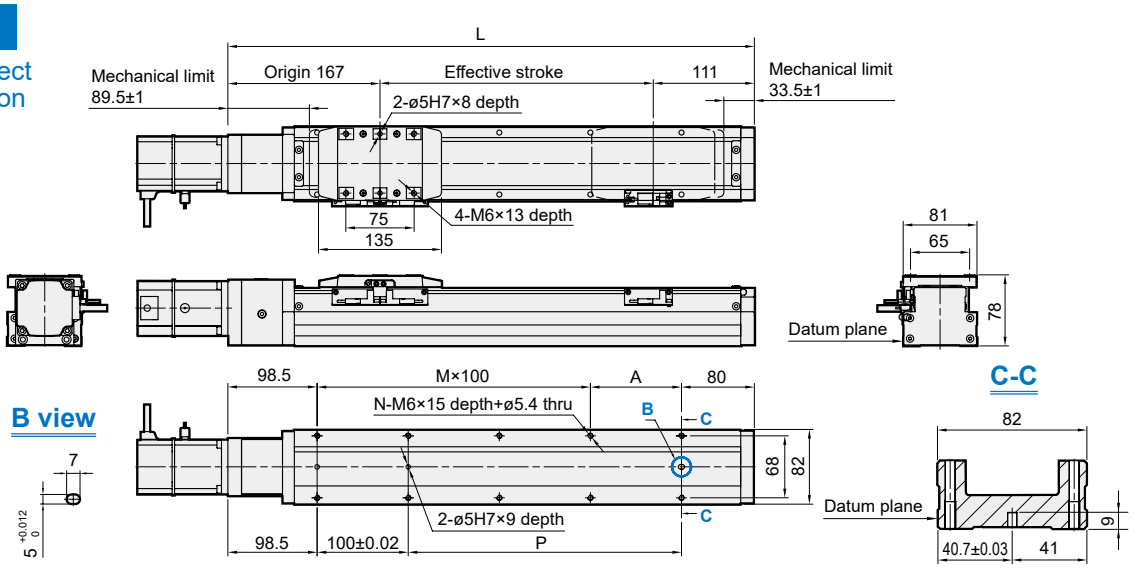

Unit: mm

Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100
L	328.5	378.5	428.5	478.5	528.5	578.5	628.5	678.5	728.5	778.5	828.5	878.5	928.5	978.5	1028.5	1078.5	1128.5	1178.5	1228.5	1278.5	1328.5	1378.5
A	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100
M	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11
N	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26
P	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100
Weight (kg)	3.91	4.29	4.7	5	5.35	5.68	6	6.35	6.64	6.97	7.41	7.71	8.12	8.41	8.65	8.96	9.27	9.58	9.89	10.2	10.51	10.82

BM
Motor on lower side

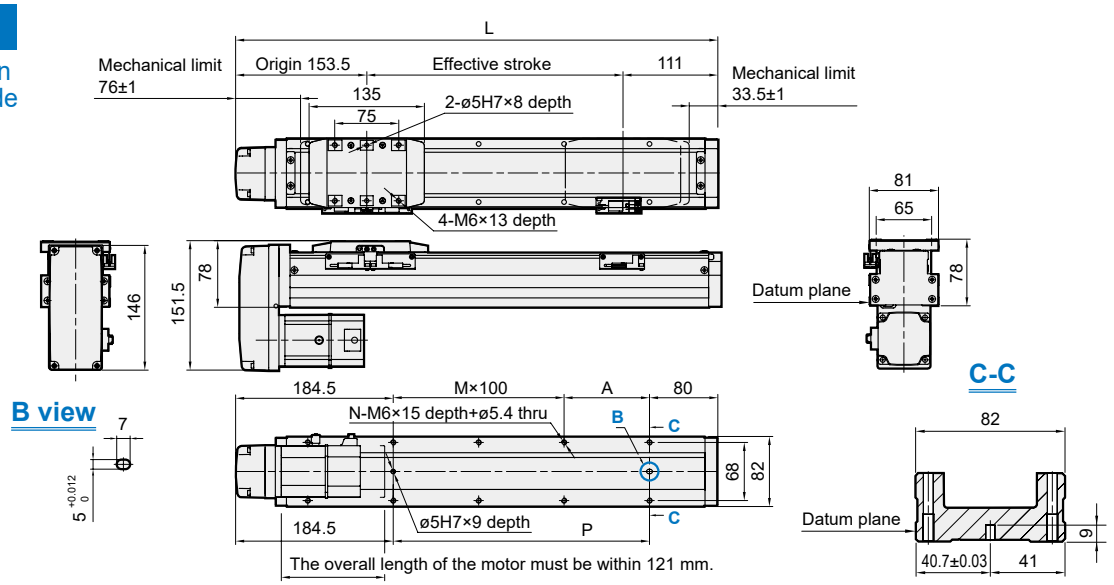

Unit: mm

Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100
L	314.5	364.5	414.5	464.5	514.5	564.5	614.5	664.5	714.5	764.5	814.5	864.5	914.5	964.5	1014.5	1064.5	1114.5	1164.5	1214.5	1264.5	1314.5	1364.5
A	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100
M	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11
N	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26
P	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100
Weight (kg)	3.95	4.33	4.74	5.09	5.39	5.72	6.04	6.39	6.68	7.01	7.45	7.75	8.16	8.45	8.69	9	9.31	9.62	9.93	10.24	10.55	10.86


* When motor with brake assembled on down side, or the total length over than spec limit, it may not use standard pinhole.
Please contact us if you need more information and requirement.

METG2-8 Dimensions

SLIDER ELECTRIC ACTUATOR – BUILT-IN GUIDEWAY (WITHOUT MOTOR)

BL

Motor on left side

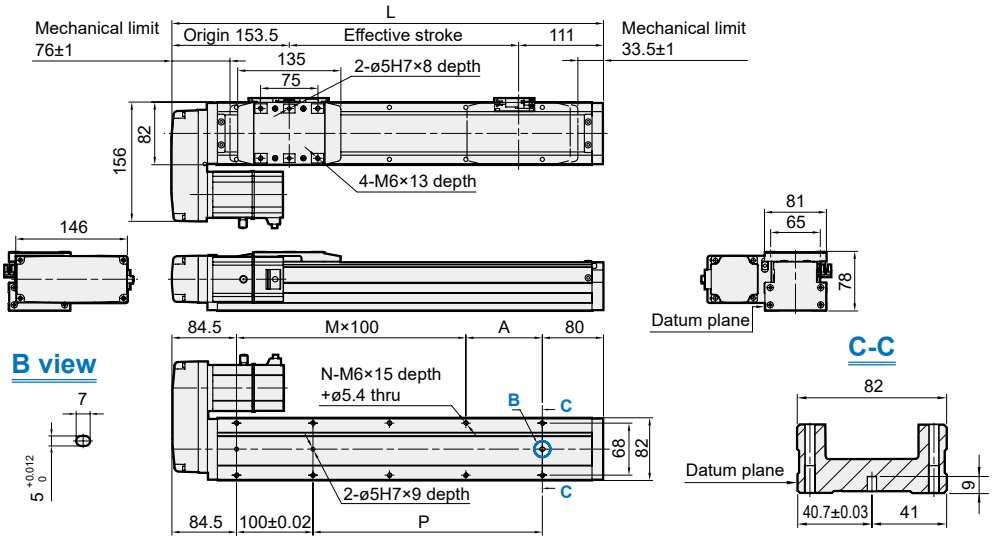


Unit: mm

Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100
L	314.5	364.5	414.5	464.5	514.5	564.5	614.5	664.5	714.5	764.5	814.5	864.5	914.5	964.5	1014.5	1064.5	1114.5	1164.5	1214.5	1264.5	1314.5	1364.5
A	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100
M	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11
N	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26
P	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100
Weight (kg)	3.95	4.33	4.74	5.09	5.39	5.72	6.04	6.39	6.68	7.01	7.45	7.75	8.16	8.45	8.69	9	9.31	9.62	9.93	10.24	10.55	10.86

BR

Motor on right side

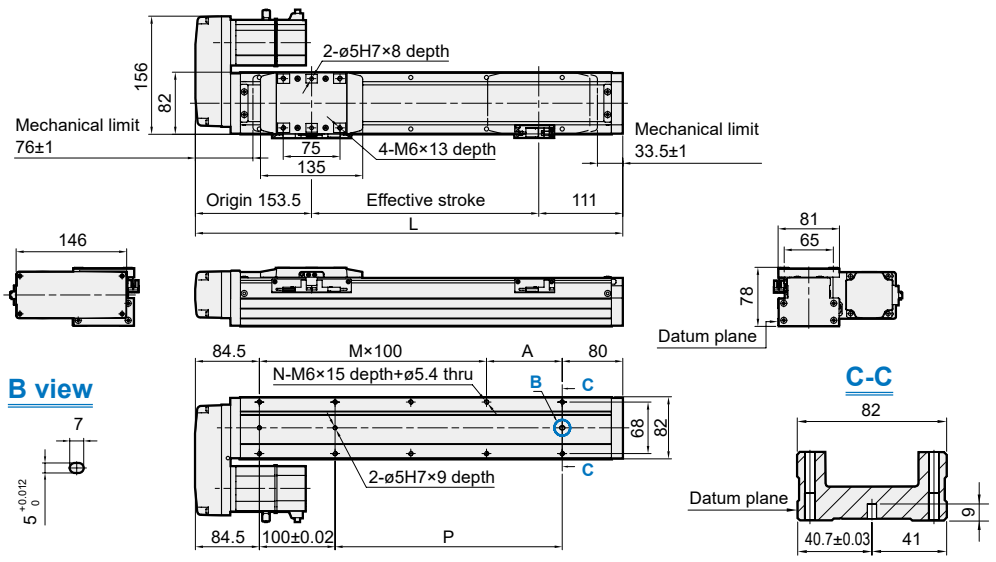

Unit: mm

Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100
L	314.5	364.5	414.5	464.5	514.5	564.5	614.5	664.5	714.5	764.5	814.5	864.5	914.5	964.5	1014.5	1064.5	1114.5	1164.5	1214.5	1264.5	1314.5	1364.5
A	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100
M	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11
N	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26
P	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100
Weight (kg)	3.95	4.33	4.74	5.09	5.39	5.72	6.04	6.39	6.68	7.01	7.45	7.75	8.16	8.45	8.69	9	9.31	9.62	9.93	10.24	10.55	10.86