MAL403 series

AIR UNIT (L.UNIT)

Technical data

User manual

Caution for safety
(Read before installing)






Option: **MLF400**

Specification

Model	MAL403		
Bore No.	8A	10A	15A
Port size	1/4	3/8	1/2
Medium	Air		
Max. operating pressure	1 MPa		
Proof pressure	1.5 MPa		
Ambient temperature	– 5~+60°C (No freezing)		
Lubricating oil capacity	200 cm^3		
Min. Flow for oil drip	30 ℓ/min	65 ℓ/min	80 ℓ/min
Recommended lubricating oil	Turbine oil ISO-VG32		
Optional attachment	C type bracket		
Weight	410 g		

Symbol



Order example

MAL403 – 8A – □□□ – B – □

MODEL

PORT SIZE
8A: 1/4
10A: 3/8
15A: 1/2


BRACKET
Blank: without
B: C type bracket


PORT THREAD
Blank: Rc thread
G: G thread
NPT: NPT thread


Bowl	Float switch	Flow direction
Blank: PC bowl **N**: Nylon bowl	Blank: without **F**: with (MLF400)	Blank: Left to right **R**: Right to left


Optional

C type bracket





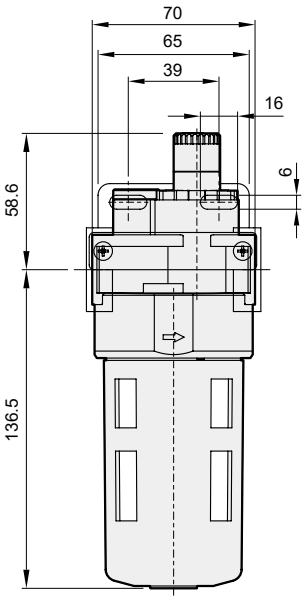

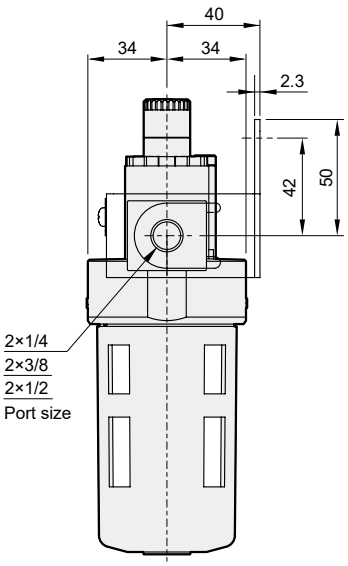

MAL403-F

Float switch

