MCHG2 series

PARALLEL GRIPPER (3-Finger)

mindman

Model selection

Technical data

Caution for safety
(Read before installing)



Features

- Through holes in body enable simple mounting.
- Body manufactured from high tensile, anodised aluminum giving good resistance to corrosion.
- Available with sensors.
- Magnetic as standard.

Order example

MCHG2 — 16 M — □


- MODEL
- TUBE I.D.: **16, 20, 25, 32, 40, 50, 63, 80, 100, 125**
- **M**: Magnet (* Magnetic as standard.)
- PORT THREAD: Blank: M thread (only for ø16~ø63); Blank: Rc thread; **G**: G thread; **NPT**: NPT thread (only for ø80~ø125)

Specification


Model		MCHG2									
Acting type		Double acting									
Tube I.D. (mm)		16 (*2)	20	25	32	40	50	63 (*2)	80	100	125
Stroke (mm)		4	4	6	8	8	12	16	20	24	32
Port size		M3×0.5	M5×0.8						Rc1/8	Rc1/4	Rc3/8
Medium		Air									
Operating pressure (MPa)		0.2~0.6			0.1~0.6						
Ambient temperature		-10~+60°C (No freezing)									
Max. operating frequency (c.p.m)		120			60				30		
Lubrication		Not required									
Effective gripping force N at (0.5 MPa) (*1)	External	14(3.1)	25(5.6)	42(9.4)	74(16.6)	118(26.5)	187(42)	335(75)	500(112)	750(169)	1270(285)
	Internal	16(3.6)	28(6.3)	47(10.6)	82(18.4)	130(29)	204(46)	359(81)	525(118)	780(175)	1320(297)
Sensor switch		RDC(V), RQC(V), RDFE(V)									
Weight (g)		80	110	150	240	400	540	1020	1880	3300	6200


*1. Values for ø16~ø25 are with gripping length(L) = 20 mm, for ø32~ø63 with gripping length(L) = 30 mm, and for ø80~ø125 with gripping length(L) = 50 mm.
*2. ø16, ø63 are available with 2-finger type (Made to order). Please contact us if other size is needed.

Installation

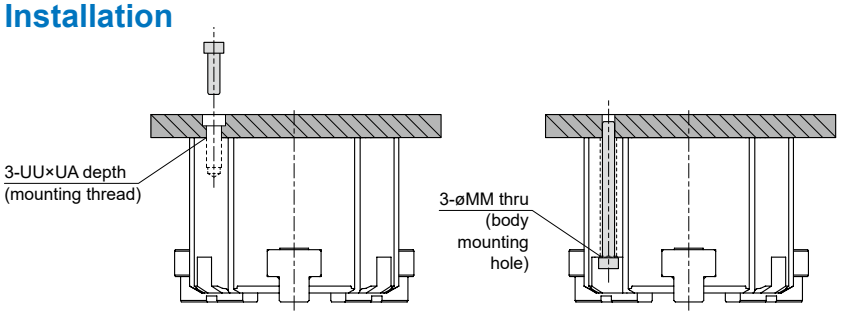

Model	MM	UU×UA	Bolt
MCHG2-16	3.4	M3×0.5×4.5	M3×0.5
MCHG2-20	3.4	M3×0.5×6	M3×0.5
MCHG2-25	4.5	M4×0.7×6	M4×0.7
MCHG2-32	4.5	M4×0.7×6	M4×0.7
MCHG2-40	5.5	M5×0.8×7.5	M5×0.8
MCHG2-50	5.5	M5×0.8×10	M5×0.8
MCHG2-63	6.6	M6×1.0×9	M6×1.0
MCHG2-80	6.6	M6×1.0×12	M6×1.0
MCHG2-100	9	M8×1.25×16	M8×1.25
MCHG2-125	11	M10×1.5×20	M10×1.5

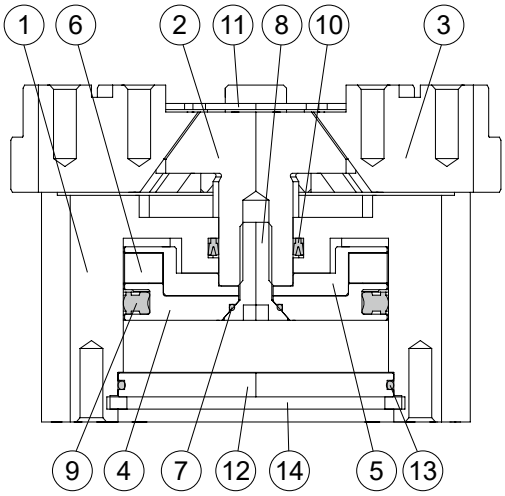

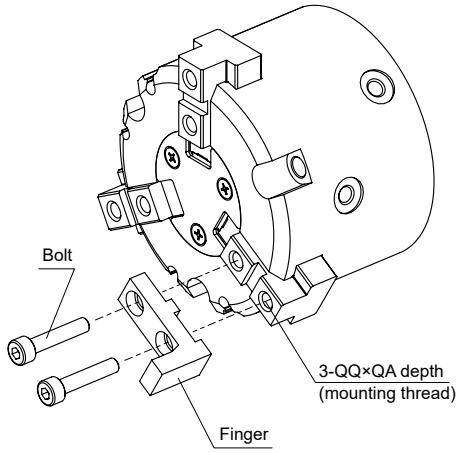

* The bolts and fingers are prepared by the customers.

Material

No.	Part name	Material	Repair kits (inclusion)
1	Body	Aluminum alloy	
2	Lever	Carbon steel	
3	Slider	Carbon steel	
4	Piston	Aluminum alloy	
5	Piston-R	Aluminum alloy	
6	Magnet ring	Magnet material	
7	O-ring	NBR	●
8	Piston bolt	Carbon steel	
9	Piston packing	NBR	●
10	Rod packing	NBR	●
11	Table	Stainless steel	
12	End plate	Aluminum alloy	
13	O-ring	NBR	●
14	Snap ring	Carbon steel	

Order example of repair kits

Tube I.D.	Repair kits
ø16	**PS-MCHG2-16**
ø20	**PS-MCHG2-20**
ø25	**PS-MCHG2-25**
ø32	**PS-MCHG2-32**
ø40	**PS-MCHG2-40**
ø50	**PS-MCHG2-50**

Tube I.D.	Repair kits
ø63	**PS-MCHG2-63**
ø80	**PS-MCHG2-80**
ø100	**PS-MCHG2-100**
ø125	**PS-MCHG2-125**

Mounting precautions

The tightening torque of slider mounting bolt, please refer to the table below.


Model	QQ×QA	Bolt	Max. tightening torque (N.m)
MCHG2-16	M3×0.5×5	M3×0.5	0.59
MCHG2-20	M3×0.5×6	M3×0.5	0.59
MCHG2-25	M3×0.5×6	M3×0.5	0.59
MCHG2-32	M4×0.7×8	M4×0.7	1.4
MCHG2-40	M4×0.7×8	M4×0.7	1.4
MCHG2-50	M5×0.8×8	M5×0.8	2.8
MCHG2-63	M5×0.8×8	M5×0.8	2.8
MCHG2-80	M6×1.0×12	M6×1.0	4.8
MCHG2-100	M8×1.25×16	M8×1.25	12
MCHG2-125	M10×1.5×20	M10×1.5	24

Effective gripping force

* Model selection .

Indication of effective gripping force.
The effective gripping force shown in the graphs to the right is expressed as F, which is the thrust of one finger, when three fingers and attachments are in full contact with the workpiece as shown in the figure below.


1N=0.102 kgf
1MPa=10.2 kgf/cm^2

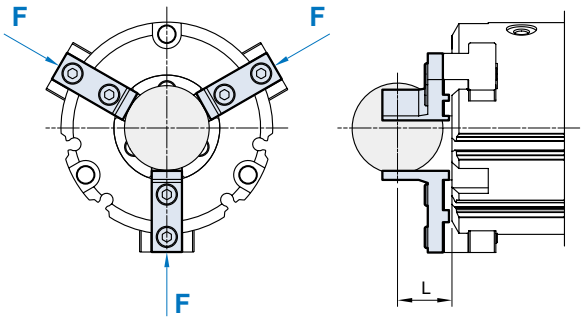


External grip

External gripping force


MCHG2-16




MCHG2-50




MCHG2-20




MCHG2-63




MCHG2-25




MCHG2-80




MCHG2-32




MCHG2-100



MCHG2-40

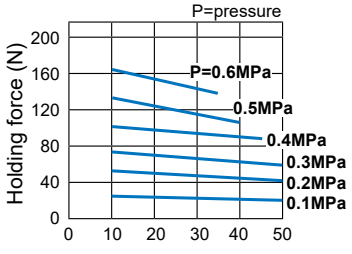

MCHG2-125




Effective gripping force

* Model selection .

Indication of effective gripping force.
The effective gripping force shown in the graphs to the right is expressed as F, which is the thrust of one finger, when three fingers and attachments are in full contact with the workpiece as shown in the figure below.


1N=0.102 kgf
1MPa=10.2 kgf/cm^2

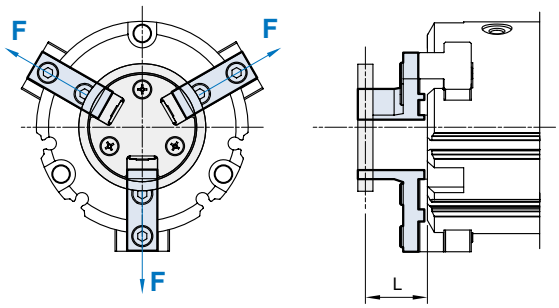


Internal grip

Internal gripping force


MCHG2-16




MCHG2-50




MCHG2-20




MCHG2-63




MCHG2-25




MCHG2-80




MCHG2-32




MCHG2-100




MCHG2-40



MCHG2-125



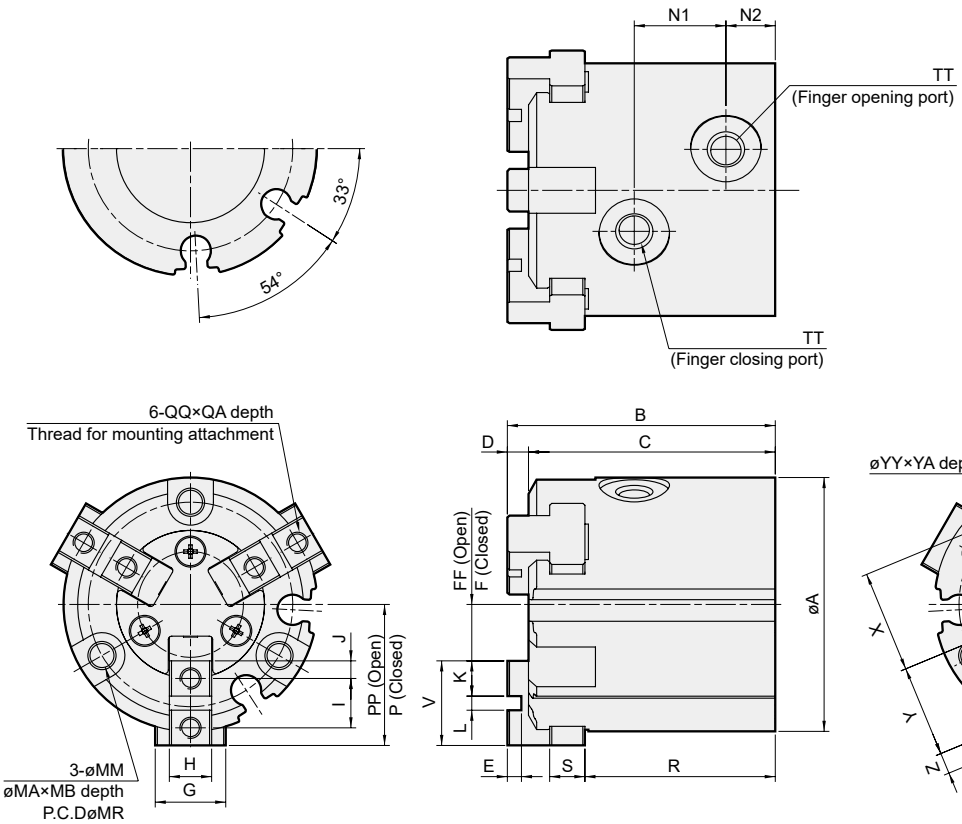


Code / Tube I.D.	A	B	C	D	E	F	FF	G	H	I	J	K	L	MA	MB	MM	MR	N1	N2	P	PP	QA	QQ	R	S	TT
16	30	35	32	3	2	5	7	8	5h9 $^{+0}_{-0.030}$	6	2	4	2H9 $^{+0.025}_{-0}$	6.5	8	3.4	25	11	7	15	17	5	M3×0.5	25	4	M3×0.5
20	36	38	35	3	2	6	8	10	6h9 $^{+0}_{-0.030}$	7	2.5	5	2H9 $^{+0.025}_{-0}$	6.5	9.5	3.4	29	13	7	18	20	6	M3×0.5	27	5	M5×0.8
25	42	40	37	3	2	7	10	12	6h9 $^{+0}_{-0.030}$	8	3	6	2H9 $^{+0.025}_{-0}$	8	10	4.5	34	15	7	21	24	6	M3×0.5	28	5	M5×0.8

Code / Tube I.D.	UA	UU	V	X	XA	XX	Y	YA	YY	Z	ZA	ZZ
16	4.5	M3×0.5	10	12.5	2	2H9 $^{+0.025}_{-0}$	11	2	2H9 $^{+0.025}_{-0}$	3	1.5	17H9 $^{+0.043}_{-0}$
20	6	M3×0.5	12	14.5	2	2H9 $^{+0.025}_{-0}$	13	2	2H9 $^{+0.025}_{-0}$	3	1.5	21H9 $^{+0.052}_{-0}$
25	6	M4×0.7	14	17	3	3H9 $^{+0.025}_{-0}$	14.5	3	3H9 $^{+0.025}_{-0}$	5	1.5	26H9 $^{+0.052}_{-0}$

MCHG2 Dimensions ø32~ø125

PARALLEL GRIPPER (3-Finger)

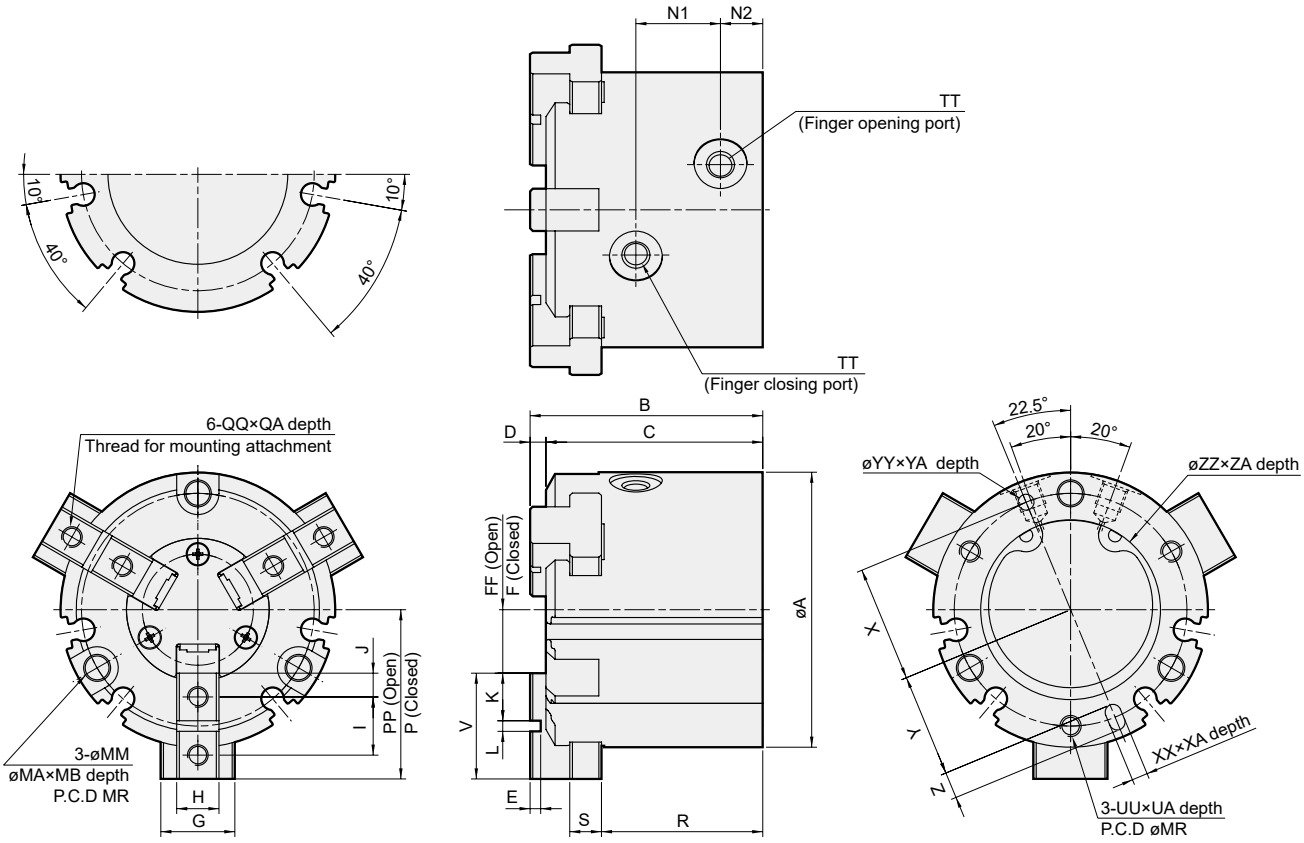

Code / Tube I.D.	A	B	C	D	E	F	FF	G	H	I	J	K	L	MA	MB	MM	MR	N1	N2	P	PP	QA	QQ
32	52	44	41	3	2	8	12	14	8h9 $^{+0}_{-0.036}$	11	4.5	9	2H9 $^{+0.025}_{-0}$	8	9	4.5	44	16	8	28	32	8	M4×0.7
40	62	47	44	3	2	10	14	16	8h9 $^{+0}_{-0.036}$	12	4.5	9	3H9 $^{+0.025}_{-0}$	9.5	9	5.5	53	17	9	31	35	8	M4×0.7
50	70	55	52	3	2	11	17	18	10h9 $^{+0}_{-0.036}$	14	5	10	4H9 $^{+0.030}_{-0}$	9.5	12	5.5	62	20	9	35	41	10	M5×0.8
63	86	66	62	4	3	15	23	24	12h9 $^{+0}_{-0.043}$	17	5.5	11	6H9 $^{+0.030}_{-0}$	11	14	6.6	76	22	12	43	51	10	M5×0.8
80	106	82	77	5	4	21.5	31.5	28	14h9 $^{+0}_{-0.043}$	20	6	12	8H9 $^{+0.036}_{-0}$	11	19	6.6	95	27	13.5	53.5	63.5	12	M6×1.0
100	134	96	90	6	4	28	40	34	18h9 $^{+0}_{-0.043}$	23	7.5	15	8H9 $^{+0.036}_{-0}$	14	21	9	118	30.6	18	66	78	16	M8×1.25
125	166	122	114	8	6	30	46	40	22h9 $^{+0}_{-0.052}$	31	10.5	21	10H9 $^{+0.036}_{-0}$	17.5	34	11	148	38	23.5	82	98	20	M10×1.5

Code / Tube I.D.	R	S	TT	UU	UA	V	X	XA	XX	Y	YY	YA	Z	ZA	ZZ
32	30.5	6	M5×0.8	M4×0.7	6	20	22	3	3H9 $^{+0.025}_{-0}$	19.5	3H9 $^{+0.025}_{-0}$	3	5	2	34H9 $^{+0.062}_{-0}$
40	32	7	M5×0.8	M5×0.8	7.5	21	26.5	4	4H9 $^{+0.030}_{-0}$	23.5	4H9 $^{+0.030}_{-0}$	4	6	2	42H9 $^{+0.062}_{-0}$
50	37.5	9	M5×0.8	M5×0.8	10	24	31	4	4H9 $^{+0.030}_{-0}$	28	4H9 $^{+0.030}_{-0}$	4	6	2	52H9 $^{+0.074}_{-0}$
63	44	11	M5×0.8	M6×1.0	9	28	38	5	5H9 $^{+0.030}_{-0}$	34.5	5H9 $^{+0.030}_{-0}$	5	7	2.5	65H9 $^{+0.074}_{-0}$
80	56	12	Rc1/8	M6×1.0	12	32	47.5	6	6H9 $^{+0.030}_{-0}$	43.5	6H9 $^{+0.030}_{-0}$	6	8	3	82H9 $^{+0.087}_{-0}$
100	63	15	Rc1/4	M8×1.25	16	38	59	6	8H9 $^{+0.036}_{-0}$	54	8H9 $^{+0.036}_{-0}$	6	10	4	102H9 $^{+0.087}_{-0}$
125	84	18	Rc3/8	M10×1.5	20	52	74	8	10H9 $^{+0.036}_{-0}$	68	10H9 $^{+0.036}_{-0}$	8	12	6	130H9 $^{+0.100}_{-0}$