
SMART AUTOMATION

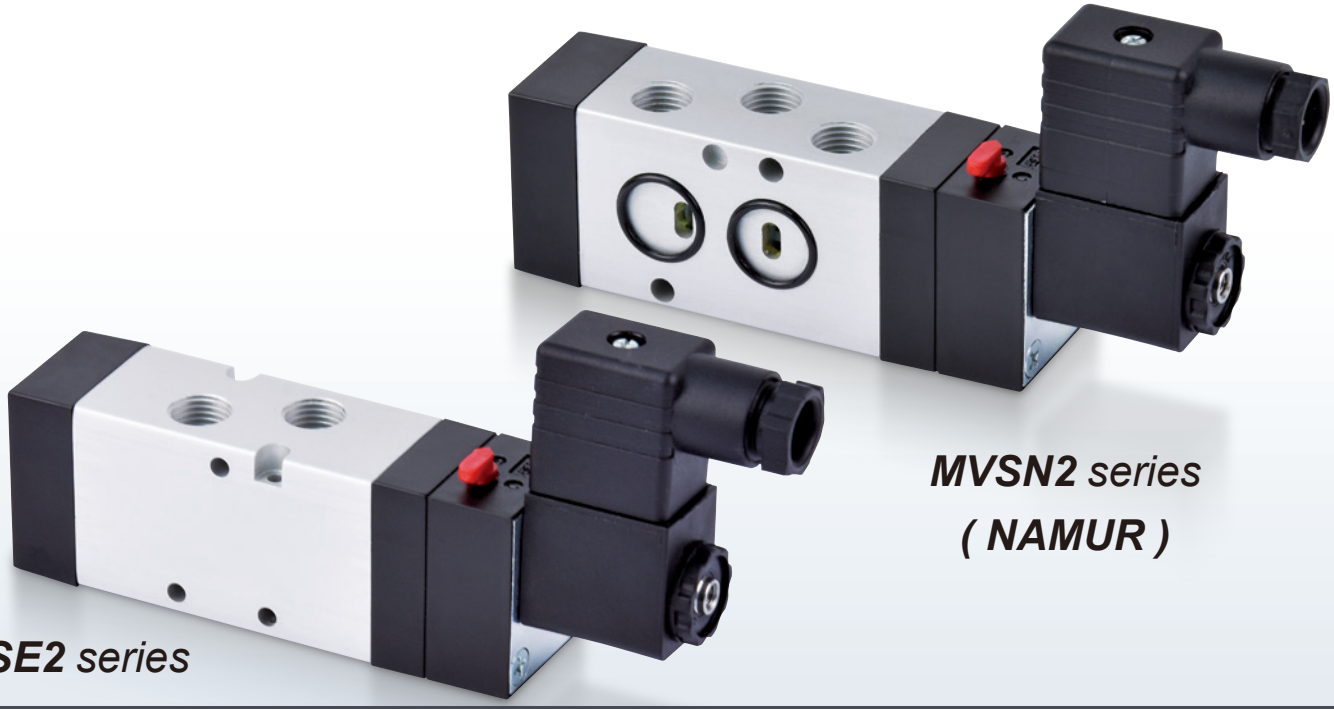

MVSN2 series
(NAMUR)

MVSE2 series

Solenoid Valve

Special Environment

Suitable for hazardous environments with the presence of gas and flammable dust

High
temperature
environment
120°C Max.

Sealing
← FKM
HNBR →

Low
temperature
environment
-35°C Min.


Industrial Application

Transport | Cement | Paper | Ceramics | Food | Clean | Stone | Natural gas | Oil | Railways

Dust — Moisture — Compatible with NAMUR — Outdoor

Features

Air Valve Shaft
Lightweight aluminum alloy
Niploy surface treatment



Shaft Ring
No lubrication required
Durable performance



Mindman