

M124D-** series

CABLE WITH CONNECTOR (MALE – RJ45 / MALE / LEAD WIRE)



M124D-SMSR



M124D-SMSM



M124D-SMW



Specification

Model	M124D-SMSR		M124D-SMSM		M124D-SMW
Female pin out					
Number of contacts	4	8	4	4	4
Rated voltage	30V DC/AC				250V DC/AC
Rated current	0.5A				1A
Contact material	Brass (Au plating)				
Contact bearer material	PVC				
Housing color	Gray				
Cable material	ø4.5, PVC				
Cable color	Gray				
Temperature	-20°C~+60°C (No freezing)				
Cable conductor	26AWG				
Protection class of contact	IP67	IP20	IP67		IP67

Order example

M124 D – SMSR – PVC – 3M

Model	Code	Connector	Cable material	Cable length
M124	M12, 4 Pin	D: D-coded SMSR: Straight male – RJ45 SMSM: Straight male – Straight male SMW: Straight male - Lead wire	PVC: ø4.5 PVC	3M: 3000 mm


M124D-** series

CABLE WITH CONNECTOR (MALE – RJ45 / MALE / LEAD WIRE)




mindman

M124D-SMSR

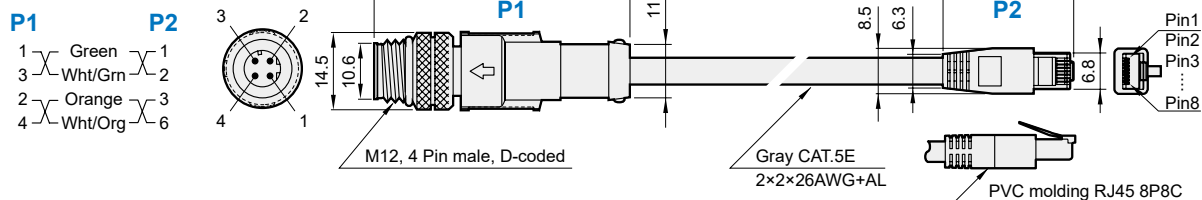

M124D-SMSM

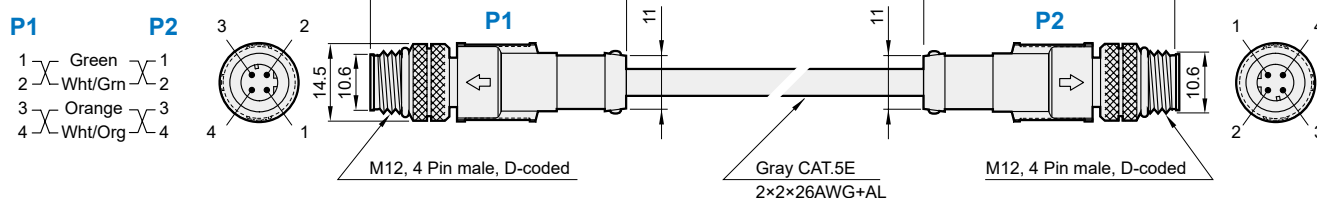

M124D-SMW

